


Colores • Colors • Couleurs • Farben / Largo • Width • Laise • Breite: ▲250 cm ★300 cm

Muestra • Sample

3002 ▲★	2002 ▲	P12030 ▲	2004 ▲	1003 ▲★
1018 ▲	938 ▲	923 ▲★	6024 ▲	LUSO ▲
6026 ▲★	5015 ▲★	95 ▲★	5013 ▲	204 ▲
1013 ▲	1014 ▲	7037 ▲★	7030 ▲	7038 ▲
3C-596 ▲	PLATA SILVER ▲★	9003 ▲★	NEGRO BLACK ▲★	

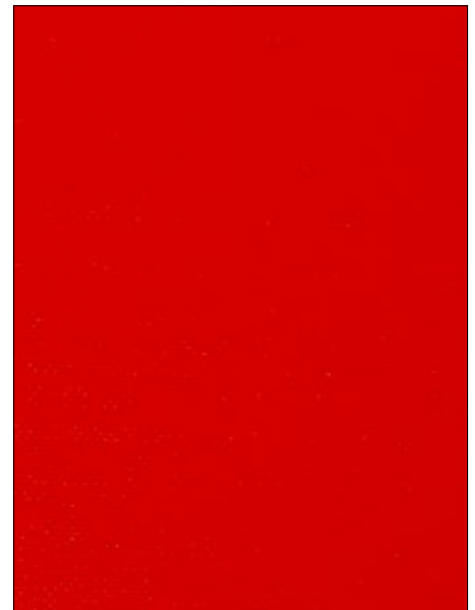

SERVICIOS

- Corte de piezas
- Metreado
- Colores personalizados
- Libre de aftalatos
- Anchos personalizados

SERVICES

- Roll slitting
- Metered rolls
- Customized colours
- Phtalate free
- Customized widths

SERVICES










- Découpe de pièces
- Métrage
- Couleurs personnalisées
- Sans aftalates
- Découpe de pièces

DIENSTLEISTUNGEN

- Zurechtschneiden von Stücken
- Meterware
- Farbe nach Kundenwunsch
- Phthalatfrei
- Kundenspezifische Breiten

Características técnicas • Technical features • Caractéristiques techniques • Technische Daten

Material base • Base material Matériel de base • Trägergewebe	 100% PES
Hilos • Yarn count Fil • Garn	 1100 dtex
Tipo de recubrimiento • Type of coating Type d'enduction • Beschichtungsart	 PVC
Acabado • Finish Finition • Endausrüstung	 Brillante lacado acrílico 2 caras • Glossy acrylic lacquered 2 sides Brillant laqué acrylique 2 faces • Beidseitiger Acryllack hochglanz beschichtet

Especificación • Specification Spécification • Spezifikation		Unidades • Units Unités • Einheiten	Método • Test Method Méthodes • Methode	Nominal • Target Nominal • Wert
	Gramaje • Total weight Poids Total • Flächengewicht	g/m ²	EN ISO 2286-2	650
	Resistencia Tracción • Tensile strength Résistance Rupture • Reißfestigkeit	URDIMBRE • WARP CHAÎNE • KETTE	daN/5cm	EN-ISO-1421
		TRAMA • WEFT TRAME • SCHUSS	daN/5cm	EN-ISO-1421
	Resistencia Desgarre • Tear strength Résistance Déchirure • Weiterreißfestigkeit	URDIMBRE • WARP CHAÎNE • KETTE	daN	DIN-53363
		TRAMA • WEFT TRAME • SCHUSS	daN	DIN-53363
	Adherencia 23°C • Adhesion 23°C Adhérence 23°C • Haftung 23°C	daN/5cm	EN ISO 2411	10
	Temperaturas máximas • Temperature resistance Températures extrêmes d'utilisation • Temperaturbeständigkeit	°C	EN 1876	-30/+70
	Ancho • Width Laise • Breite	cm	EN ISO 2286-1	250 300*
	Resistencia a la flexión • Crack resistance Résistance à la fissuration • Reißfestigkeit	pliegues / folds plis / Falten	EN ISO 7854/B	>100.000
	Reacción al fuego • Flame retardancy Retardateur de flamme • Schwerentflammbarkeit	mm/min.	DIN-75200	<100
	Espesor • Thickness Grosseur • Dicke	mm	EN ISO 2286-3	0,53



La información facilitada corresponde a valores promedio de un producto recién fabricado con un rango de tolerancia de +/-10 %, se facilita como indicación y guía solamente, sin ninguna vinculación jurídica. Los valores proporcionados se refieren al estado original de la mercancía enviada antes del procesamiento o elaboración por parte del cliente. Por razones técnicas puede haber ligeras variaciones durante la producción, así como pequeñas alteraciones del color, las referencias al RAL son solo indicativas. El cliente como propietario del diseño debe comprobar la aptitud y compatibilidad del producto para el uso previsto antes de proceder a su procesamiento o elaboración.

The information provided corresponds to average values of a newly manufactured product with a tolerance range of +/- 10% which is provided as an indication and guidance only, without any legal binding. The values provided refer to the original status of the goods sent before processing or handling by the customer. For technical reasons there may be slight variations during production, as well as slight color alterations, the RAL references are only indicative. The customer as owner of the design must check the aptitude and compatibility of the product for the intended use before proceeding with its processing or elaboration.



ACREDITADO POR ENAC

INDUSTRIAL **SEDÓ**

Desde 1889



+34 977 65 50 07

info@industrialsedo.com

www.industrialsedo.com

Industrial Sedó, S.L.

Camí Mas Llagostera S/N

43762 La Riera de Gaià

(Tarragona) Spain

www.industrialsedo.com



ACREDITADO POR ENAC