


Colores • Colors • Couleurs • Farben / Largo • Width • Laise • Breite: ★300 cm

Muestra • Sample

P12030 ★	3002 ★	2002 ★	2004 ★	1003 ★
5015 ★	5002* ★	5007* ★	5013 ★	PLATA SILVER ★
5023 ★	5028* ★	95 ★	204 ★	9003 ★
1018* ★	1014 ★	7038 ★	7035* ★	NEGRO BLACK ★
6024 ★	6026 ★	7030 ★	7037 ★	
6036* ★	6039* ★			

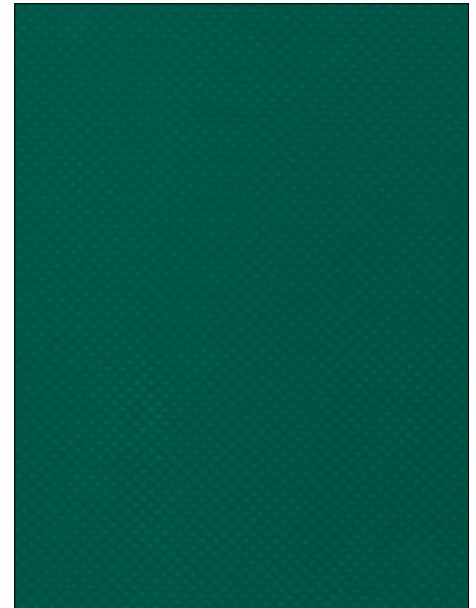

\* Consultar disponibilidad o pedido mínimo

\* Check availability or minimum order

\* Consulter disponibilité ou minimum de commande

\* Konsultieren Sie Verfügbarkeit oder Mindestbestellmenge



## SERVICIOS

- Corte de piezas
- Metreado
- Colores personalizados
- Libre de aftalatos
- Anchos personalizados

## SERVICES

- Roll slitting
- Metered rolls
- Customized colours
- Phthalate free
- Customized widths





## SERVICES










- Découpe de pièces
- Métrage
- Couleurs personnalisées
- Sans aftalates
- Découpe de pièces

## DIENSTLEISTUNGEN

- Zurechtschneiden von Stücken
- Meterware
- Farbe nach Kundenwunsch
- Phthalatfrei
- Kundenspezifische Breiten

## Características técnicas • Technical features • Caractéristiques techniques • Technische Daten

Material base • Base material Matériel de base • Trägergewebe	 100% PES
Hilos • Yarn count Fil • Garn	 1100 dtex
Tipo de recubrimiento • Type of coating Type d'enduction • Beschichtungsart	 PVC
Acabado • Finish Finition • Endausrüstung	 Brillante lacado acrílico 2 caras • Glossy acrylic lacquered 2 sides Brillant laqué acrylique 2 faces • Beidseitiger Acryllack hochglanz beschichtet

Especificación • Specification Spécification • Spezifikation		Unidades • Units Unités • Einheiten	Método • Test Method Méthodes • Methode	Nominal • Target Nominal • Wert	
	<b>Gramaje • Total weight</b> Poids Total • Flächengewicht	g/m <sup>2</sup>	EN ISO 2286-2	930	
	<b>Resistencia Tracción • Tensile strength</b> Résistance Rupture • Reißfestigkeit	URDIMBRE • WARP CHAÎNE • KETTE	daN/5cm	EN-ISO-1421	400
		TRAMA • WEFT TRAME • SCHUSS	daN/5cm	EN-ISO-1421	380
	<b>Resistencia Desgarre • Tear strength</b> Résistance Déchirure • Weiterreißfestigkeit	URDIMBRE • WARP CHAÎNE • KETTE	daN	DIN-53363	60
		TRAMA • WEFT TRAME • SCHUSS	daN	DIN-53363	50
	<b>Adherencia 23°C • Adhesion 23°C</b> Adhérence 23°C • Haftung 23°C	daN/5cm	EN ISO 2411	12	
	<b>Temperaturas máximas • Temperature resistance</b> Températures extrêmes d'utilisation • Temperaturbeständigkeit	°C	EN 1876	-30/+70	
	<b>Ancho • Width</b> Laise • Breite	cm	EN ISO 2286-1	300	
	<b>Filtro UV • Filter</b> Filtre UV • UV-Filer			OK	
	<b>Resistencia a la flexión • Crack resistance</b> Résistance à la fissuration • Reißfestigkeit	pliegues/folds	EN ISO 7854/B	>100.000	
	<b>Espesor • Thickness</b> Grosueur • Dicke	mm	EN ISO 2286-3	0,80	



La información facilitada corresponde a valores promedio de un producto recién fabricado con un rango de tolerancia de +/-10 %, se facilita como indicación y guía solamente, sin ninguna vinculación jurídica. Los valores proporcionados se refieren al estado original de la mercancía enviada antes del procesamiento o elaboración por parte del cliente. Por razones técnicas puede haber ligeras variaciones durante la producción, así como pequeñas alteraciones del color, las referencias al RAL son solo indicativas. El cliente como propietario del diseño debe comprobar la aptitud y compatibilidad del producto para el uso previsto antes de proceder a su procesamiento o elaboración.

The information provided corresponds to average values of a newly manufactured product with a tolerance range of +/- 10% which is provided as an indication and guidance only, without any legal binding. The values provided refer to the original status of the goods sent before processing or handling by the customer. For technical reasons there may be slight variations during production, as well as slight color alterations, the RAL references are only indicative. The customer as owner of the design must check the aptitude and compatibility of the product for the intended use before proceeding with its processing or elaboration.



ACREDITADO POR ENAC

# INDUSTRIAL **SEDÓ**

*Desde 1889*



+34 977 65 50 07

info@industrialsedo.com

www.industrialsedo.com

**Industrial Sedó, S.L.**

Camí Mas Llagostera S/N

43762 La Riera de Gaià

(Tarragona) Spain

# www.industrialsedo.com



ACREDITADO POR ENAC