


Colores • Colors • Couleurs • Farben / Largo • Width • Laise • Breite: ▲250 cm ★300 cm

Muestra • Sample



\* Consultar disponibilidad o pedido mínimo \* Check availability or minimum order \* Consulter disponibilité ou minimum de commande \* Konsultieren Sie Verfügbarkeit oder Mindestbestellmenge

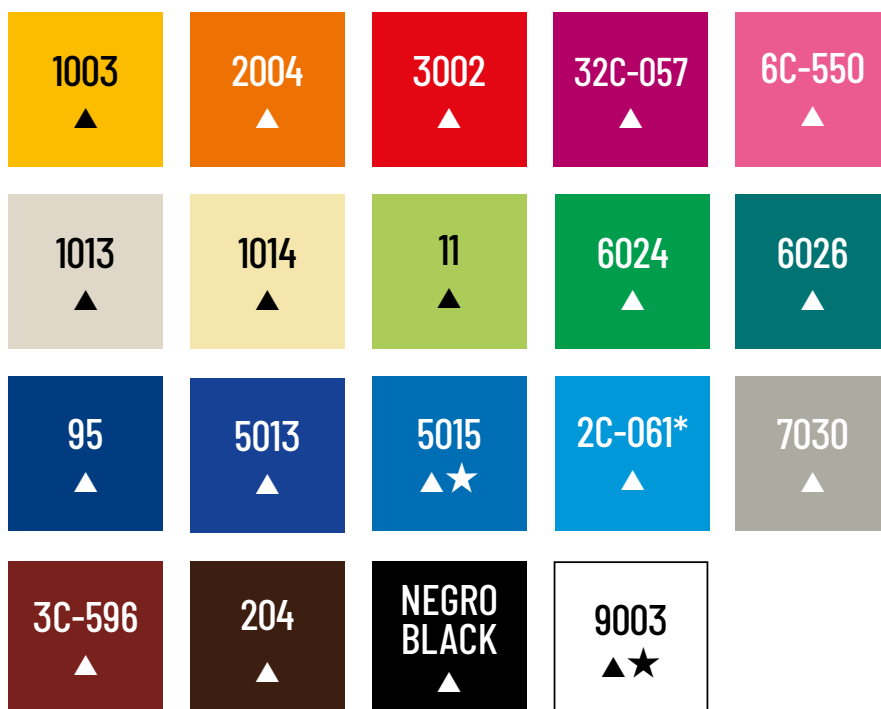

## SERVICIOS

- Corte de piezas
- Metreado
- Colores personalizados
- Libre de aftalatos
- Anchos personalizados

## SERVICES

- Roll slitting
- Metered rolls
- Customized colours
- Phtalate free
- Customized widths

## SERVICES











- Découpe de pièces
- Métrage
- Couleurs personnalisées
- Sans aftalates
- Découpe de pièces

## DIENSTLEISTUNGEN

- Zurechtschneiden von Stücken
- Meterware
- Farbe nach Kundenwunsch
- Phthalatfrei
- Kundenspezifische Breiten

## Características técnicas • Technical features • Caractéristiques techniques • Technische Daten

<b>Material base</b> • Base material Matériel de base • Trägergewebe	 100% PES
<b>Hilos</b> • Yarn count Fil • Garn	 1100 dtex
<b>Tipo de recubrimiento</b> • Type of coating Type d'enduction • Beschichtungsart	 PVC
<b>Acabado</b> • Finish Finition • Endausrüstung	 Brillante lacado acrílico 2 caras • Glossy acrylic lacquered 2 sides Brillant laqué acrylique 2 faces • Beidseitiger Acryllack hochglanz beschichtet

		<b>Especificación</b> • Specification Spécification • Spezifikation	<b>Unidades</b> • Units Unités • Einheiten	<b>Método</b> • Test Method Méthodes • Methode	<b>Nominal</b> • Target Nominal • Wert
	<b>Gramaje</b> • Total weight Poids Total • Flächengewicht		g/m <sup>2</sup>	EN ISO 2286-2	620
	<b>Resistencia Tracción</b> • Tensile strength Résistance Rupture • Reißfestigkeit	<b>URDIMBRE</b> • WARP • CHAÎNE • KETTE <b>TRAMA</b> • WEFT • TRAME • SCHUSS	daN/5cm daN/5cm	EN-ISO-1421 EN-ISO-1421	250 260
	<b>Resistencia Desgarre</b> • Tear strength Résistance Déchirure • Weiterreißfestigkeit	<b>URDIMBRE</b> • WARP • CHAÎNE • KETTE <b>TRAMA</b> • WEFT • TRAME • SCHUSS	daN daN	DIN-53363 DIN-53363	30 28
	<b>Adherencia 23°C</b> • Adhesion 23°C Adhérence 23°C • Haftung 23°C		daN/5cm	EN ISO 2411	10
	<b>Temperaturas máximas</b> • Temperature resistance Températures extrêmes d'utilisation • Temperaturbeständigkeit		°C	EN 1876	-30/+70
	<b>Ancho</b> • Width Laise • Breite		cm	EN ISO 2286-1	250 300
	<b>Filtro UV</b> • UV Filter Filtre UV • UV-Filter				OK
	<b>Tratamiento antifúngico</b> • Antifungal treatment Traitement anti-moisissures • Fungizid Ausgerüstet			EN 13773:2003	OK CL1
	<b>Reacción al fuego</b> • Flame retardant Réaction au feu • Brenverhalten				
	<b>Espesor</b> • Thickness Grosseur • Dicke		mm	EN ISO 2286-3	0,52



La información facilitada corresponde a valores promedio de un producto recién fabricado con un rango de tolerancia de +/-10 %, se facilita como indicación y guía solamente, sin ninguna vinculación jurídica. Los valores proporcionados se refieren al estado original de la mercancía enviada antes del procesamiento o elaboración por parte del cliente. Por razones técnicas puede haber ligeras variaciones durante la producción, así como pequeñas alteraciones del color, las referencias al RAL son solo indicativas. El cliente como propietario del diseño debe comprobar la aptitud y compatibilidad del producto para el uso previsto antes de proceder a su procesamiento o elaboración.

The information provided corresponds to average values of a newly manufactured product with a tolerance range of +/- 10% which is provided as an indication and guidance only, without any legal binding. The values provided refer to the original status of the goods sent before processing or handling by the customer. For technical reasons there may be slight variations during production, as well as slight color alterations, the RAL references are only indicative. The customer as owner of the design must check the aptitude and compatibility of the product for the intended use before proceeding with its processing or elaboration.



ACREDITADO POR ENAC

# INDUSTRIAL **SEDÓ**

*Desde 1889*



+34 977 65 50 07

info@industrialsedo.com

www.industrialsedo.com

**Industrial Sedó, S.L.**

Camí Mas Llagostera S/N

43762 La Riera de Gaià

(Tarragona) Spain

# www.industrialsedo.com



ACREDITADO POR ENAC